


## ROAD KING C-1

- Engineered to provide even distribution of ground pressure and to give optimum compaction
- Tread compound specially formulated to endure high temperatures and minimize loose materials sticking to tires

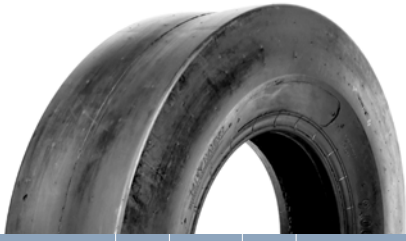

SIZE	PLY RATING	RIM WIDTH (INCH)	TYPE	SECTION WIDTH		OVERALL DIAMETER		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
				MM	INCH	MM	INCH	KG	LBS	BAR	PSI		KMPH	MPH
7.50-15	14	6.0	TT	226	8.9	789.9	31.1	2300	5060	8.6	125	137	A4/20	A4/12
11.00-20	18	8.0	TT	305	12.0	1082	42.6	4730	10406	8.5	120	162	A4/20	A4/12

## ROCK LUG E-3

- The special non-directional tread design formulated with silica tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions



SIZE	PLY RATING	RIM WIDTH (INCH)	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
				MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	32 <sup>WDS</sup>	KG	LBS	BAR	PSI		KMPH	MPH
14.00-24	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	25.0	31	9500	20900	8.6	124	186	A2/10	A2/6
15.5-25	12	12.0	TL	394	15.5	1278	50.3	569	22.4	3658	144.0	25.0	31	5600	12320	4.0	58	168	A2/10	A2/6
17.5-25	16	14.0	TL	432	17.0	1344	52.9	635	25.0	3955	156.0	28.0	35	7300	16060	3.0	44	158	A2/10	A2/6
17.5-25	20	14.0	TL	432	17.0	1344	52.9	635	25.0	3955	156.0	28.0	35	8250	18150	4.0	58	164	A2/10	A2/6
20.5-25	20	17.0	TL	531	20.9	1485	58.5	686	27.0	4394	173.0	29.5	37	9520	20944	3.2	45	170	A2/10	A2/6
20.5-25	24	17.0	TL	531	20.9	1485	58.5	686	27.0	4394	173.0	29.5	37	10278	22660	5.2	74	189	A2/10	A2/6

